



LPK 1613

HYMILER

High on performance
High fuel efficiency





In the highly competitive mining and construction industry, having the right kind of vehicle gives you the edge to stay ahead. Now Tata Motors offers you a new generation tipper that's just what you need for your business.

Introducing **Tata LPK 1613 HYMILER**, the tipper that combines **high performance** with **high fuel efficiency**. While its performance significantly reduces your downtime, its fuel efficiency ensures valuable savings for you.


Read on to discover the unmatched benefits of **Tata LPK 1613 HYMILER**.



26%


Increased gradeability of 26%

Performance-enhancing features




Tata 697 TCIC BSIII Engine

A 136 HP engine, with optimised power, gives higher torque at lower rpm, to ensure higher fuel efficiency in every trip.



Bigger Clutch

More friction area (352 mm dia clutch), for transferring higher engine power and torque to the driveline. It also increases life of the clutch assembly and reduces maintenance costs.



Heavy Duty Gearbox

Proven Tata G-600 gearbox ensures optimum gear ratios for improved efficiency and smoother gear shift resulting in increased driving comfort.



Heavy Duty Tata RA 109 RX Axle

It has a wider cross-section beam and stronger axles, to ensure better life and enhanced load bearing capacity.

LPK 1613
HYMILER



Technical Specifications

ENGINE

Model	697 TCIC BS III
Max. Engine Output	136 HP at 2400 rpm
Max. Torque	490 Nm at 1400 rpm

CLUTCH

Type	Single Plate Dry Friction Pull Type
Size	352 mm

GEARBOX

Model	TATA G - 600 FGR 8.47
No. of Gears	6 Forward, 1 Reverse

REAR AXLE

Model	TATA RA - 109RX
Ratio	5.86: 1 (41/7)

FRONT AXLE

Heavy Duty Forged I Beam, Reverse Elliot Type

STEERING

Type	Hydraulic-assisted Power Steering
Ratio	20.2:1

BRAKES

Service Brake	Fully Duplicated, Full Air S-Cam Brake System
---------------	---

FRAME

Ladder Type Heavy Duty Frame with rivetted / bolted cross members. Side members are of Channel Section.
Frame: 285 x 65 x 7 mm; Frame Width: 888 mm

SUSPENSION

Semi-elliptical Leaf Spring at Front and Rear

WHEELS & TYRES

Tyres	10.00 x 20 -16 PR Diagonal Ply
-------	--------------------------------

FUEL TANK

Capacity	150 litres for 32 WB, 160 litres for 36 WB
----------	---

CAB / COWL

All-steel Full Forward Control Driver's Cab / Cowl and Fully Built Options

ELECTRICAL SYSTEMS

System Voltage	24 Volts
Alternator Capacity	55-65 Amps

PERFORMANCE

Max. Speed	79 kmph		
Gradeability	26%		
Wheel Base (mm)	3225	3625	4225
Min. Turning Circle	6550	7250	
Radius (mm)			

MAIN CHASSIS DIMENSIONS AS PER IS:9435 (mm)

Track Front	1964
Track Rear	1814
Max. Width	2434
Front Overhang	1336
Overall Length	36 WB 6100 (1290 ROH)

WEIGHT (kg)


Max. Per GVW	16200
FAW	6000
RAW	10200

BODY OPTIONS


Wheel Base (mm)	3225	3625	4225
Body Size	4.5 Cum Box	8.5 Cum, 6.5 Cum Box / 6 Cum Scoop	10 Cum Box / Drop Side Body



LPK 1613 HYMILER

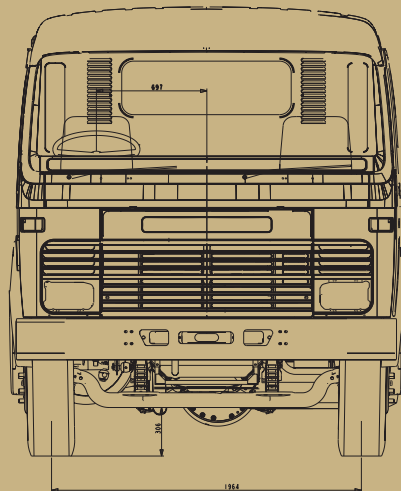

All dimensions are in mm

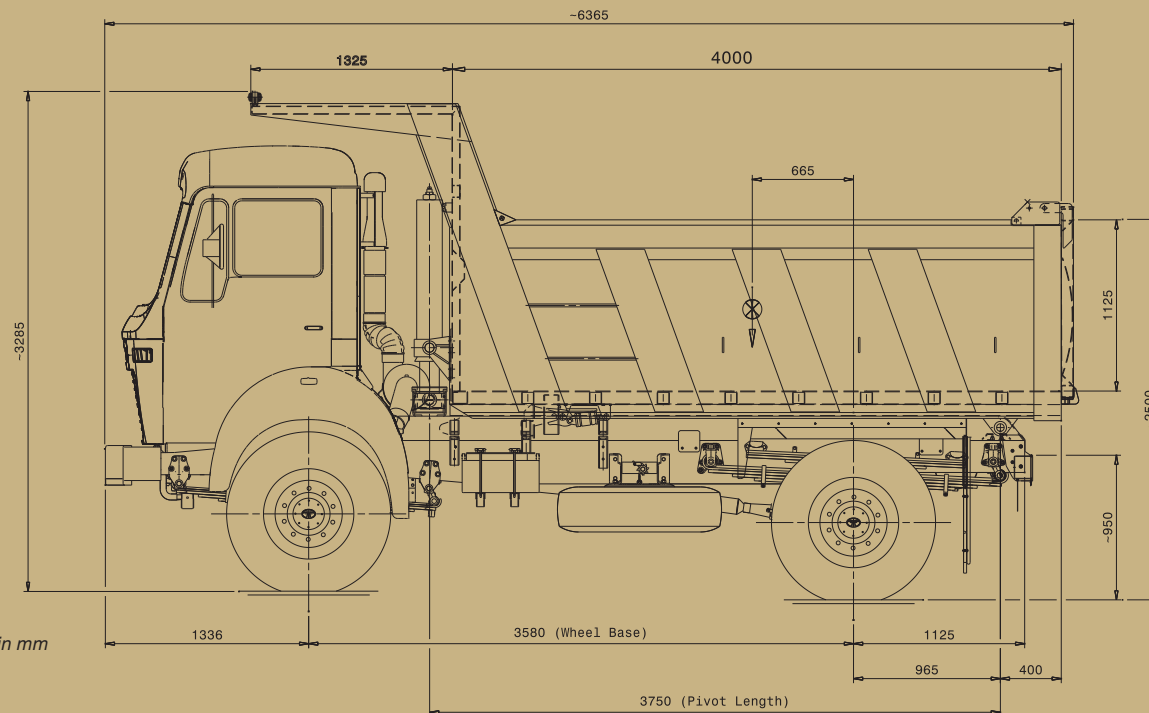

SAMPORNA
SEVA
(Annual Maintenance Contract Facility Available)
Customer Assistance centre at
Toll-free 18002097979

TATA
Delight
Har Kadam Par Khushiyan

TATA MOTORS

For more information, please visit www.construck.tatamotors.com. You can also contact our Sales Office: Tata Motors Limited, 20th Floor, Tower 2, One Indiabulls Centre, 841 Senapati Bapat Marg, Mumbai 400 013. Tel.: +91 22 66586000, Fax: +91 22 66586010; or write to us at: construck@tatamotors.com

CAUTION: Do not weld or drill on the chassis frame. Indicative specifications for reference only. Contents are subject to change without notice. Body capacity depends upon the density of material. For optimum performance, load within stipulated GVW.