

Makes every trip an
experience in comfort.



Presenting the Starbus 24-Seater.
Unmatched urban transportation.

Now you don't have to face the stress and strain of travel in the city.

The Starbus 24-Seater makes sure every trip is a comfortable one.

Thanks to its superior design and state-of-the-art body building technology.


Reliability | Durability | Best Design & Aesthetics | Superior Passenger Comfort

Features: Designed & manufactured at the fully automated manufacturing & assembly plant of Tata Motors Marcopolo Ltd. at Dharwad, Karnataka • Built on the proven & reliable Tata LP 410 platform • 3400 mm wheelbase ensures more passenger carrying capacity • Smart, contemporary looks • Backed by the widest & best after sales service & spares network in India

Starbus 24-Seater *is designed for*

- Corporate – employee transportation
- Transportation for BPO employees
- **Also available in school variant**, with all comfort & safety features (26-Seater)
- Tour & Travel – intra-city operations
- Feeder service – to and fro transportation from pick-up points

Model Name	Starbus 24	
Emission	BS III	BS IV
Chassis Platform	LP 410 / 34 BS III Diesel; 24-Seater	LP 410 / 34 BS IV Diesel; 24-Seater
Engine	Tata 497 SP Turbo-charged, 2956 cc	Tata 497 Turbo-charged, Inter-cooled, 3783 cc
Engine Power	75 Kw (101 HP) @ 2800 rpm	75 Kw (101 HP) @ 2600 rpm
Engine Torque	300 Nm @ 1400-1500 rpm	300 Nm @ 1300-1800 rpm
Clutch	280 mm Dry Single Plate	280 mm Dry Single Plate
Gear Box	GBS-27; 5 forward + 1 reverse	GBS-550; 6 forward + 1 reverse
Suspension	Semi-elliptical leaf spring; Hydraulic double acting telescopic shock absorber; Anti-roll bar (front & rear)	Semi-elliptical leaf spring; Hydraulic double acting telescopic shock absorber; Anti-roll bar (front & rear)
Tyres	7.50 x 16 - 16PR	7.50 x 16 - 16PR
Fuel Tank Capacity (litres)	60 litres	60 litres
Turning Circle Diameter (m)	12.3	12.3
Maximum GVW (kg)	6520	6520
Electricals	12 Volts, 75 Ah; Alternator: 65 Amps	12 Volts, 120 Ah; Alternator: 65 Amps
BODY:		
Seating Capacity & Layout	24 + 1, 2x2	
Structure	Galvanized tubular structure	
Floor	Anti-skid vinyl	
Passenger Door	1 jack knife type	
Front Windshield	Single piece laminated glass	
Rear Windshield	Single piece tempered glass	
Emergency Exits	Rear of bus, breakable rear glass with hammer	
Side Windows	Sliding glasses	
Roof Lamps	2 red rear & 2 white front	
Step Lamp	Yes	
Fire Extinguisher	1 no. of 2 kg capacity	
Hatrack	Tubular hatrack	
Window Guardrail	Two rows	
Bell Switch	1 no. on stanchion pipe	
Emergency Alarm	Yes	
Fire Retardent Material	For all interior material used in the bus	
Side Luggage Booth	Yes	
Overall Dimensions:		
Wheelbase (mm)	3400	
Length (mm)	6870	
Overall Height (mm)	2865	
Max. Width (mm)	2200	
Internal Height (mm)	1900	

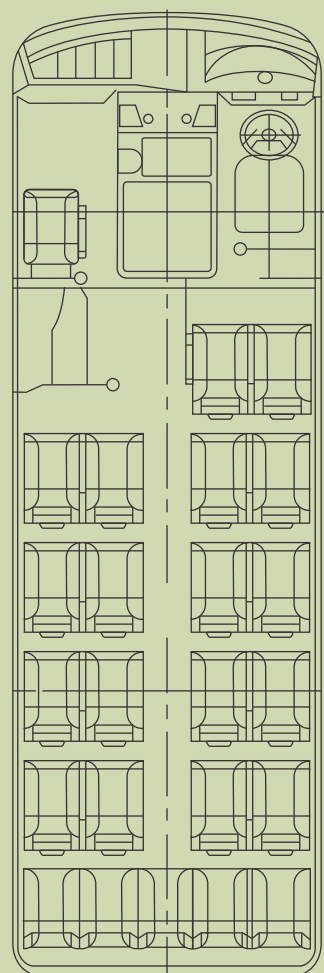

TATA
Starbus

TATA MOTORS

For more information, please visit our website: www.buses.tatamotors.com
You can also contact our Sales Office: 20th Floor, Tower 2, One Indiabulls Centre, 841 Senapati Bapat marg, Mumbai 400 013. Tel.: +91 22 66586000 Fax: +91 22 66586010. Email: businfo@tatamotors.com

The illustrations and photographs may show accessories and items of optional equipment which are not part of standard specifications. Due to printing processes, colours may vary slightly from those shown. All listed specifications are current and subject to change or upgrades without prior notice, in accordance with the Company's policy of continuous product improvement.